

Blane Hunt
Project Manager
Operations Center

Phone: (910) 678-2557
Fax: (910) 678-7043
email: blanehunt@ccs.k12.nc.us

EMAIL COVER SHEET

Date: **April 24, 2019**

Attention: **Bidders**

Email Address: **See Below**

Company: **See Below**

Regarding: **Freezer Additions at
Cumberland Road & Rockfish Elementary Schools**

Number of pages including this one: 5

Original will follow.

Comments:

Attached you will find Addendum No. 3 for the above referenced project.

Ben Stout Real Estate (christina@benstoutconstruction.com)

Cross Creek Construction of Fayetteville (neillg@gmail.com)

L & L Drywall & Construction Co., Inc. (dl@lldrywall-construction.com)

M&E Contracting (ron@m-eci.com)

Nichols Buildings, Inc. (nicbldgs@earthlink.net)

Spell Construction (seldridge@spellconstructioninc.com)


Please give me a call if you have any questions.

Signed:

Blane Hunt

Confidential and Privileged: The information contained in this facsimile is privileged and confidential information intended for the sole use of the addressee. If the reader of this facsimile is not the intended recipient or the employee or agent responsible for delivering it to the intended recipient, you are hereby notified that any dissemination, distribution, or copying of this correspondence is strictly prohibited. If you have received this FAX in error, please immediately notify the sender, and return the original message by mail to the sender at the address listed below.

Mailing Address: 810 Gillespie Street, Fayetteville, North Carolina 28306



**Project: Freezer Additions at Cumberland Road
and Rockfish Elementary Schools**

**Addendum No. 3
Date: April 24, 2019**

**Owner: Cumberland County Schools
801 Gillespie Street
Fayetteville, N.C. 28306**

**NEW Bid Date: May 1, 2019
Time: 11:00AM**

The following changes, additions and clarifications are made to the General Conditions, Drawings and Specifications for the above referenced project. **Number of pages (1)**

Comments:

1. The **Bid Date** is changed to **May 1, 2019** at the same time (11:00am).
2. The Freezer Addition for Rockfish Elementary School is on hold, it will not be bid under this project. See attached new bid form.
3. The new door for Cumberland Road Elementary School as shown on the "New Floor Plan" is deleted and the canopy and freezer will shift to the existing dumpster +4'-0". The cut line as shown on the "Demolition Plan" will change to 23'-8" in lieu of 27'-8". See attached revised drawing.
4. A section of post and chain from the corner of the building behind the asphalt curbing will have to be removed for the installation of the new fencing.

Attachments – 4 Sheets

END OF ADDENDUM NO. 3

BID FORM

Freezer Additions at Cumberland Road and Rockfish Elementary Schools

Cumberland County Board Of Education
Fayetteville, NC

The undersigned, as Bidder, hereby declares that the only person or persons interested in this Proposal as principal or principals is or are named herein and that no other person than herein mentioned has any interest in this Proposal or in the contract to be entered into; that this proposal is made without connection with any other person, company or parties making a bid or proposal; and that it is in all respects fair and in good faith without collusion or fraud. The Bidder further declares that he has examined the site of the Work and the Contract Documents relative thereto, and has read all special provisions furnished prior to the opening of bids; that he has satisfied himself relative to the work to be performed.

The Bidder proposes and agrees if this Proposal is accepted to contract with Cumberland County Schools, Fayetteville, North Carolina, in the form of contract specified, to furnish all necessary materials, equipment, machinery, tools, apparatus, means of transportation and labor necessary to complete the **Freezer Additions at Cumberland Road and Rockfish Elementary Schools** in accordance with the plans, specifications, and contract documents to the full and entire satisfaction of Cumberland County Schools, Fayetteville, North Carolina with a definite understanding that no money will be allowed for extra work except as set forth in the General Conditions and the Contract Documents, for the sum of:

Project: Freezer Additions at Cumberland Road Elementary School
Installation and sales taxes are included.

TOTAL Base Bid _____

_____ Dollars (\$ _____)

Breakout cost: The Contractor is to breakout the cost for the freezers and shelving units that are included in the Base Bid.

Breakout Cost: _____

Minority Status *:	Form of Minority Certification**:
--------------------	-----------------------------------

*Non-minority, Black, Hispanic, Asian/American, White Female, Socially and Economically Disadvantaged
**Not Applicable, Local Agency, Self-Identified, State of NC HUB, Federal Agency, State of NC DOT, Out of State Agency, Unknown (Note: In July 2009, businesses will be required to be certified through the State of NC HUB)

BID FORM

Freezer Additions at Cumberland Road and Rockfish Elementary Schools

Cumberland County Board Of Education
Fayetteville, NC

The Bidder further proposes and agrees hereby to commence work under this contract and fully complete all work thereunder as specified in the Supplementary General Conditions. Applicable liquidated damages shall be stated in the Supplementary General Conditions.

Respectfully submitted this _____ day of _____, 2019.

(Name of firm or corporation making bid)

Witness: _____ By: _____

Title: _____

(Proprietorship or Partnership)

(Owner/Partner/Corp. President or Vice President only)

Address: _____

License No.: _____

Federal ID No.: _____

(CORPORATE SEAL)

ATTEST:


By: _____

Title: _____

(Corp. Sec. or Ass't Sec. only)

ADDENDA USED IN COMPUTING THIS BID

ADDENDUM NO. 1 _____ ADDENDUM NO. 2 _____

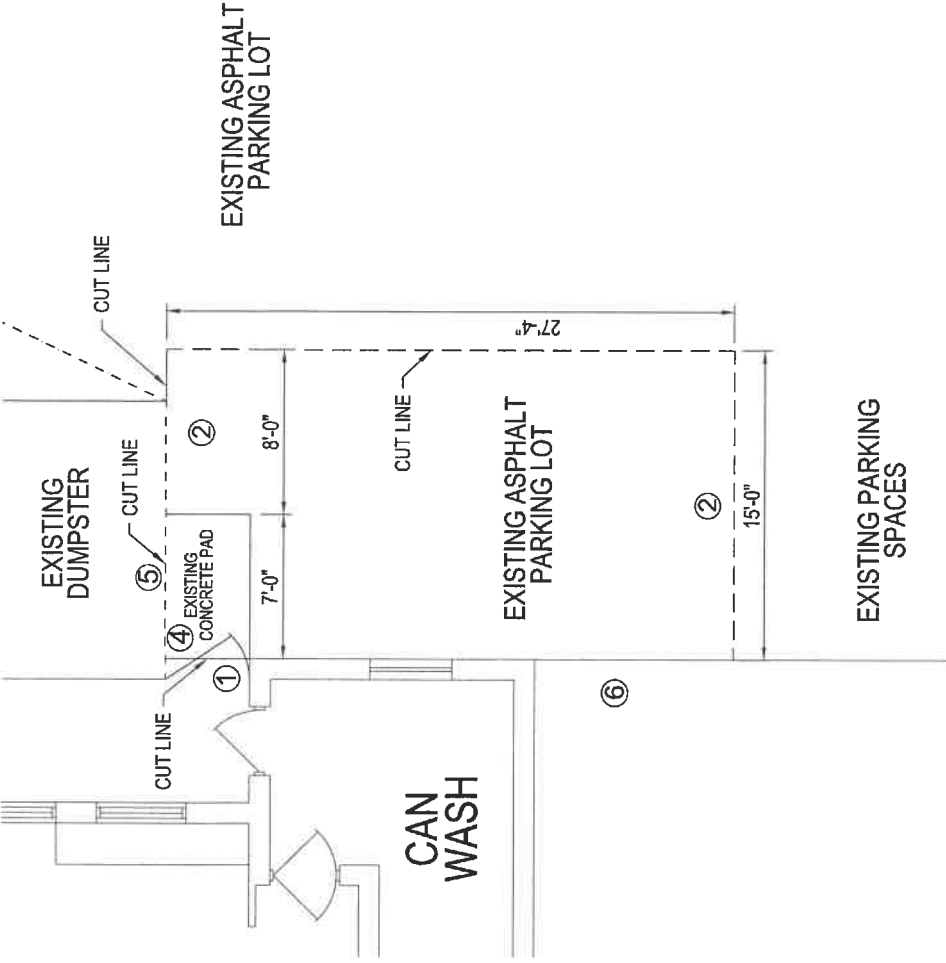


NOTES:

- ① Existing gate to be removed; turn over to the Owner.
- ② Cut and remove 15'-0" X 27'-8" of existing asphalt, including asphalt curbing for the installation of the new concrete pad and steel bollards.
- ③ Cut 3'-10" X 7'-2" opening for installation of new hollow metal frame door. Prep for installation of door header--see attached detail.
- ④ Cut existing concrete sidewalk from corner of building to dumpster pad and remove.
- ⑤ Remove existing wood fence.
- ⑥ Remove section of existing steel post with chain.

DEMOLITION PLAN - REVISED

FREEZER ADDITION AT CUMBERLAND ROAD ELEMENTARY

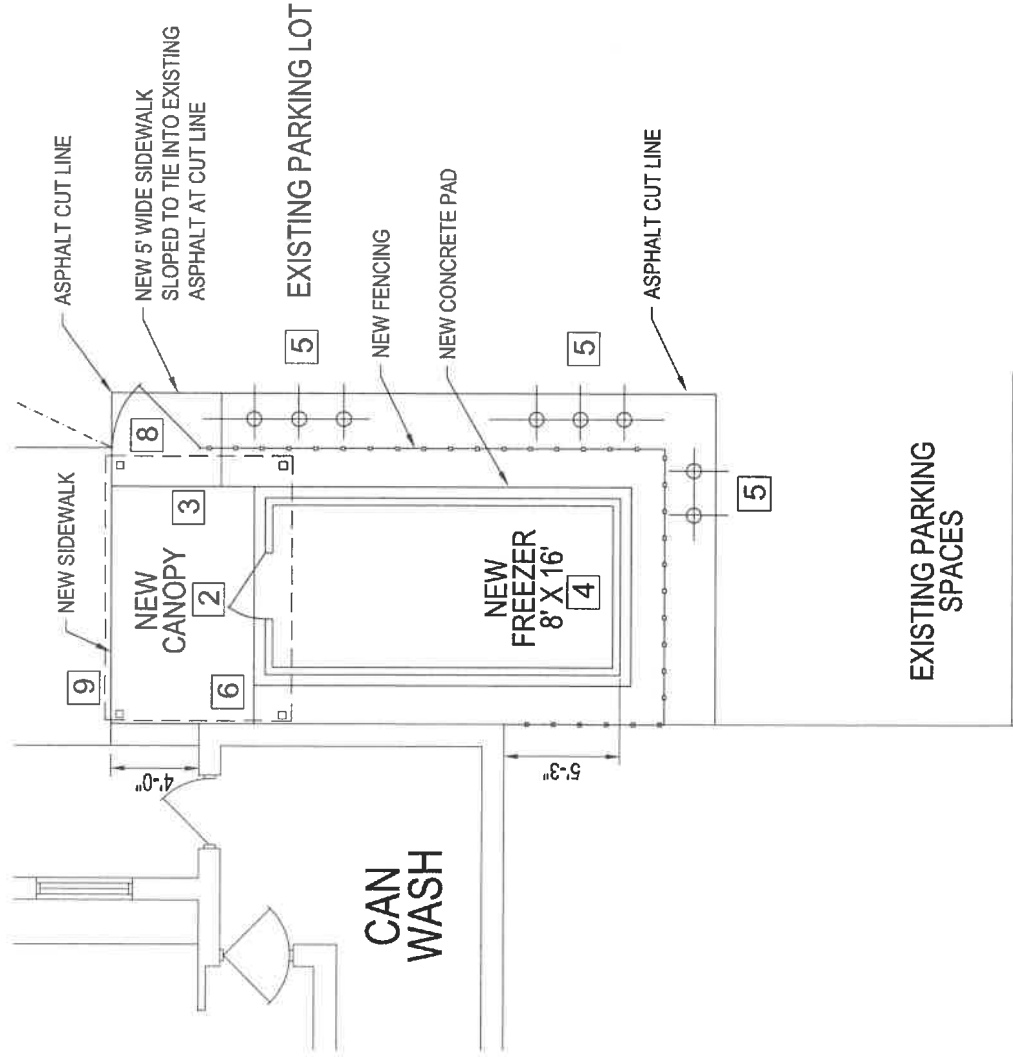

NOTES:

- 1 New 3'-6" X 7'-0" hollow metal door and 3'-10" X 7'-2" knock-down hollow metal frame.
- 2 New 8'-6" X 13'-6" X 9'-0" high canopy to be installed w/ 4 X 4 post. Canopy is to extend 3" beyond post.
- 3 New 6'-6" X 10'-9" sidewalk to freezer
- 4 New Concrete pad for freezer to be 10' x 17'
- 5 New steel bollards 6" diameter concrete filled - painted yellow at +2'-0" O.C. - 8 total.
- 6 New door bell to be installed:
- 7 Contractor to wire new freezer. 25 AMP breaker for freezer from allowance.
- 8 New Fencing to be installed and tied in from the Existing Fencing located at the Existing Dumpster to include a New 4'-0" Access Gate.
- 9 New wire fabric attached to existing post with PVC slats.

NEW FLOOR PLAN - REVISED

FREEZER ADDITION AT CUMBERLAND ROAD ELEMENTARY